


## WATER BATHS WTB

according to DIN 12876-3; EN 61010-1 (IEC 61010-1); EN 61010-2-010

Standard units are safety-approved and bear the test marks:



- Interior: deep-drawn stainless steel tray (stainless steel W.St. 1-4301), heating mounted from the outside, without corners and edges for easy cleaning incl. central drain (no disturbing installations)
- Housing: textured stainless steel 1.4301 (ASTM 304), intuitive 3.5" colour graphic display with touch screen
- Connection: mains cable with plug (German type)
- Installation: 4 adjustable appliance feet

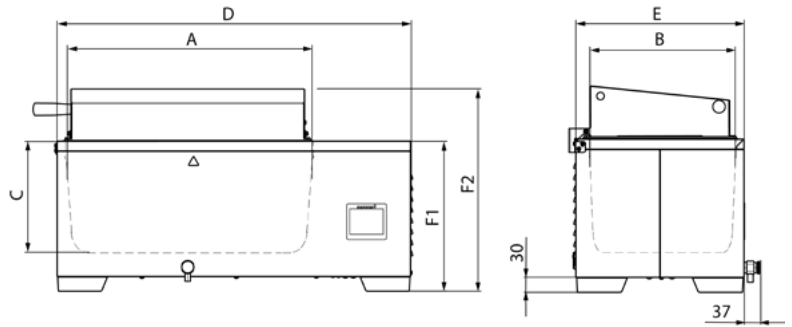

Model sizes/Description			6	11	15	24	35	50
Stainless steel interior	Volume	l	7.5	10	17.1	23.1	37.5	51
	Length	(A) mm	277	267	482	472	602	592
	Width	(B) mm	217	207	277	267	482	472
	Height	(C) mm	150	200	150	200	150	200
Textured stainless steel exterior	Length	(D) mm	479		749		868	
	Width	(E) mm	289		349		554	
	Height (with flat cover)	(F1) mm	272	322	272	322	272	322
	Height (with gable cover)	(F2) mm	375	425	375	425	375	425
Standard equipment	Stainless steel gable cover		●					
Temperature	Working temperature range	°C	at least 5 above ambient temperature up to +100 (with cover, depending on ambient pressure)					
	Setting temperature range	°C	+10 to +100					
	Setting accuracy	°C	0.1					
Further data	Electrical load at 230 V, 50/60 Hz	W	1000		1420		2800	
	Electrical load at 115 V, 50/60 Hz	W	1000		1420		1800	
Packing data	Net weight	kg	11	12	18	20	30	33
	Gross weight (packed in carton)	kg	13	14	21	23	34	37
	Length	mm	579		849		968	
	Width	mm	389		449		654	
	Height	mm	475	525	475	525	475	525
<b>Order No. Water baths</b>			<b>WTB6</b>	<b>WTB11</b>	<b>WTB15</b>	<b>WTB24</b>	<b>WTB35</b>	<b>WTB50</b>